

PRODUCT DATA


Enviroplug® # 20

Sealant

Description **Enviroplug® No. 20** is a high-swelling Wyoming Bentonite in granular form.

Application **Enviroplug® No. 20** is used in sealing and plugging applications.

Properties 97% minimum passing 8 mesh
5% maximum passing 20 mesh

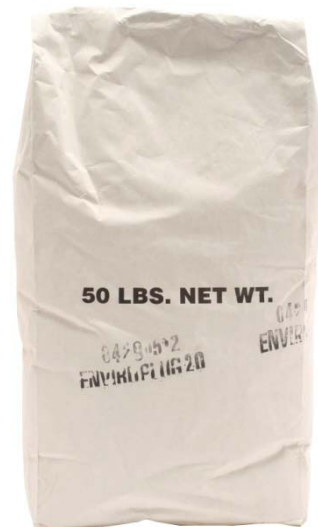

Function **Enviroplug® No. 20** is an ideal sealant due to its unique molecular structure that allows it to absorb five times its weight of water and swell to a volume of 12 to 16 times its dry bulk. Applied dry or as a pumpable slurry, fine granules of **Enviroplug® No. 20** expand against casings and formations to create a flexible grout seal with very low permeability

Mixing **Enviroplug® No. 20** may be mixed as a pumpable slurry – using a polymer to delay hydration time – or it may be added dry.

A wide variety of sealing products and application methods exist. Please consult local regulations, a groundwater professional or a product representative before beginning any sealing or abandonment procedure.

WHMIS: Controlled (see MSDS)

TDG: Not regulated

Packaging: 50 lb multi-wall paper sack and is available in bulk

Physical properties and bioassay information are available on request.

